

DATE: 03-2-2020

HURST-ROSCHE, INC.
1400 E. Tremont Street
Hillsboro, Illinois 62049
217-532-3959

TO: PROSPECTIVE BIDDERS

SUBJECT: ADDENDUM NO. 3 TO THE BIDDING DOCUMENTS FOR

SUMMER 2020 H/LS IMPROVEMENTS
EAST ALTON / WOOD RIVER HIGH SCHOOL
EAST ALTON / WOOD RIVER CHSD NO 14
WOOD RIVER, MADISON COUNTY, ILLINOIS
HR # 150-2419

This addendum forms a part of the bidding and contract documents and modifies the original bidding documents dated February 10, 2020. Acknowledge receipt of this addendum in the space provided on the Bid Form. **FAILURE TO DO SO MAY SUBJECT BIDDER TO DISQUALIFICATION.**

Upon receipt of this addendum, please sign below and email to Hurst-Rosche, Inc. at tdownen@hurst-rosche.com within 24 hours of receipt.

RECEIVED BY:	_____
	Company Name/Authorized Representative
DATE:	_____

CLARIFICATIONS

- A. Addendum #2
 - 1. **DELETE** the reference to bid date of “Thursday, May 5” and **REPLACE** it with, “Thursday, March 5”. The bid date will remain as advertised and as listed in the bidding documents.

SPECIFICATIONS

- A. Section 09 67 00 Fluid-Applied Flooring
 - 1. **ADD** Attachment #1 as a generic detail to reinforce Paragraph 2.3.C.

This addendum consists of 2 pages and 1 attachment consisting of 1 additional page.

DRAWINGS

A. Sheet A-103

1. **ADD** the following as Keyed Note #22, "EXISTING FULL HEIGHT WALL TILE TO BE DEMOLISHED FROM EXISTING CMU WALL. SCRAPE MORTAR AND PREPARE CMU WALL SURFACE FOR NEW WALL TILE AS RECOMMENDED BY TILE MANUFACTURER."
2. **ADD** Keyed Note #22 symbols in Boys Toilet C103 and Girls Toilet C104.
3. **ADD** the following as Keyed Note #23, "EXISTING WALL TILE WAINSCOT TO BE DEMOLISHED FROM EXISTING PLASTER WALL. SCRAPE MORTAR AND PREPARE PLASTER WALL SURFACE FOR NEW WALL TILE AS RECOMMENDED BY TILE MANUFACTURER."
4. **ADD** Keyed Note #23 symbol in Girls Toilet A075. No tile is present in Lounge A073 nor entry corridor.

B. Sheet A-104

1. **ADD** the following as Room Finish Schedule Remark #4, "WALLS ARE PARTIALLY NEW PORCELAIN TILE AND PARTIALLY EXISTING PLASTER AS INDICATED ON A-107. EXISTING PLATER TO BE PREPARED, PRIMED AND PAINTED."
2. **ADD** Remark #4 to Lounge A073 and Girls Toilet A075.
3. **DELETE** "MP" from the North Wall column of the Room Finish Schedule for Girls Toilet C202 and **REPLACE** it with, "PLAST".

C. Sheet P-102

1. **DELETE** Keyed Note #2 and **REPLACE** it with, "PROVIDE URINAL (UR-1 AND UR-2) AT LOCATION INDICATED. EXTEND EXG. SANITARY AND SUPPLY PIPING AS REQUIRED TO INSTALL NEW FIXTURE AND ENSURE REMAINING EXG. SYSTEMS ARE FULLY CODE COMPLIANT. INSTALL SINGLE SHUT OFF VALVE FOR GROUP OF URINALS. VALVE SHALL CONCEALED BUT BE EITHER ACCESSIBLE ABOVE ACOUSTICAL CEILING OR IN CHASE ACCESSIBLE THROUGH EXITING OR NEW ACCESS PANEL."

D. Sheet ME-102

1. **ADD** the following to Keyed Note #4, "8 INCH ROUND TERMINATION AT WALL CAP CAN BE USED THROUGH THE EXISTING WALL AND TO THE EXHAUST FAN. ALL DUCTWORK FROM EXHAUST FAN TO DIFFUSERS SHALL BE SQUARE DUCT AS INDICATED."

This addendum **DOES NOT** alter the previously published bid date of **Thursday, March 5, 2020, 2:00 PM**, prevailing time, at **East Alton / Wood River CHSD No. 14, 777 North Wood River Avenue, Wood River, IL**.


Sincerely,

HURST-ROSCHKE, INC.



Timothy L. Downen, AIA, LEED AP
cc: All plan holders

This addendum consists of 2 pages and 1 attachment consisting of 1 additional page.

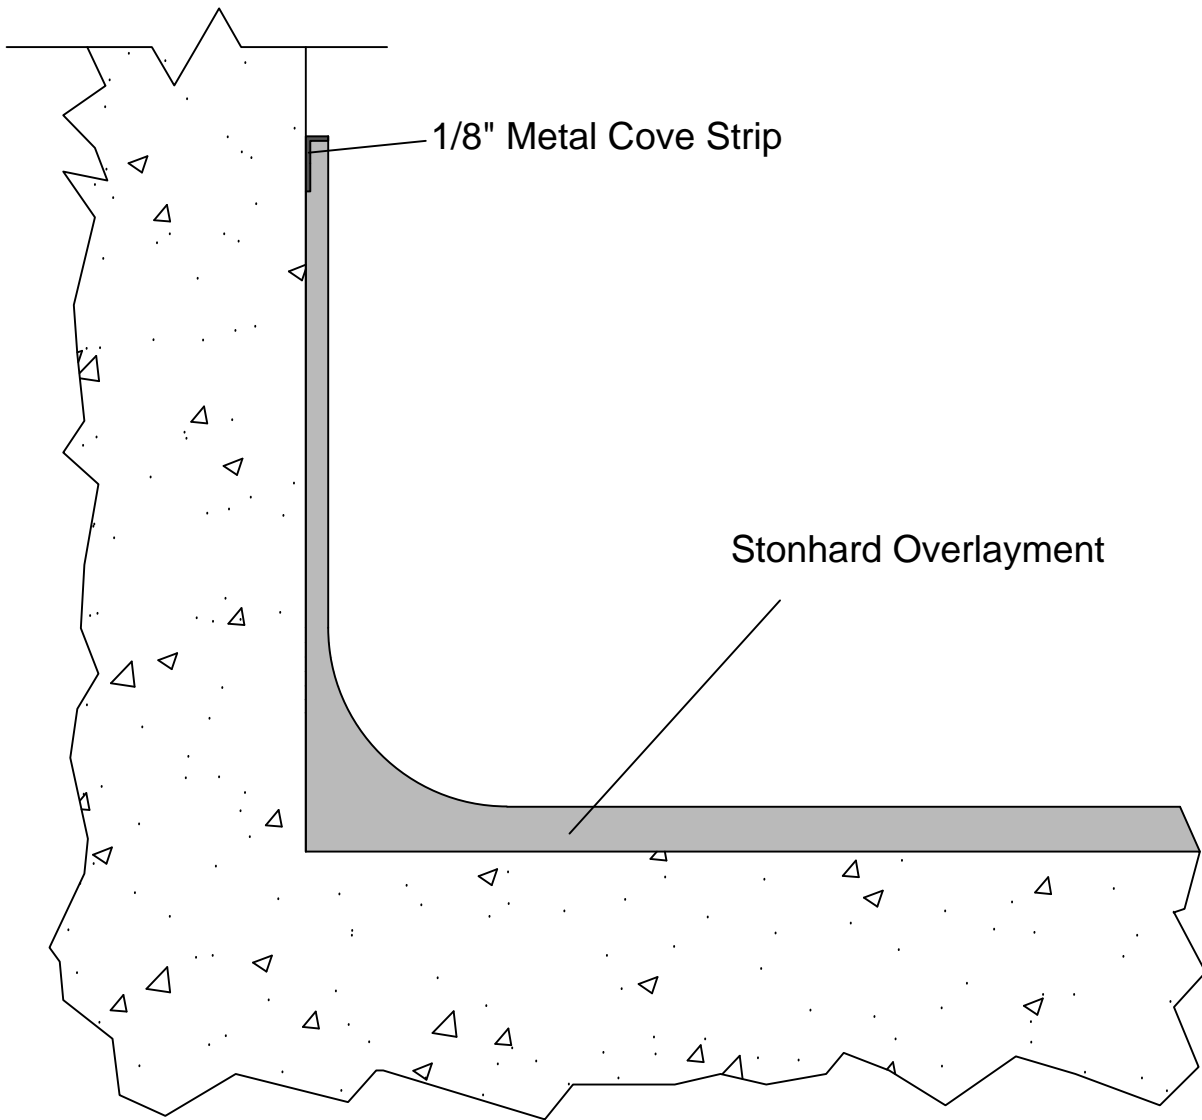

1/8" Metal Cove Strip

Stonhard Overlayment

Architectural Detail

Cove Base Detail
With Cove Strip

STONHARD
One Park Avenue

Maple Shade New Jersey 08052

Scale: NTS	Date: 06/20/2011	Drawing no.: CB.001	Drawn by: KMB
---------------	---------------------	------------------------	------------------