

DATE: February 6, 2023

HURST-ROSCHE, INC.
1400 E. Tremont Street
Hillsboro, Illinois 62049
217-532-3959

TO: PROSPECTIVE BIDDERS

SUBJECT: ADDENDUM NO. 2 TO THE BIDDING DOCUMENTS FOR

**FLOOR TILE REPLACEMENT
MORRISONVILLE ELEMENTARY SCHOOL
MORRISONVILLE C.U.S.D. NO. 1
MORRISONVILLE, CHRISTIAN COUNTY, ILLINOIS
HR # 150-3242**

This addendum forms a part of the bidding and contract documents and modifies the original bidding documents dated January 23, 2023. Acknowledge receipt of this addendum in the space provided on the Bid Form. **FAILURE TO DO SO MAY SUBJECT BIDDER TO DISQUALIFICATION.**

Upon receipt of this addendum, please sign below and email to Hurst-Rosche, Inc. at tdownen@hurst-rosche.com within 24 hours of receipt.

RECEIVED BY:	_____
	Company Name/Authorized Representative
DATE:	_____

SPECIFICATIONS


- A. A-101 TILE REPLACEMENT PLAN
1. **ADD** the following as General Note #6, “The Owner will remove and reinstall the existing drinking fountain interfering with tile work at the door recess into the music room where Keyed Note #5 is located to identify Alternate Bid #2.”
 2. **ADD** the following at General Note #7, “The existing ramp will receive new vinyl composition tile in Color 2 while the balance of the work will be done in Color 1 (excluding what is already identified for Alternate Bid #2).”
 3. **ADD** the following as General Note #8, “The contractor will be responsible for any electrical work related to connection of heat machine.”
 4. **ADD** the following as General Note #9, “The contractor will be responsible for preparing (3) three 8'-0” long existing expansion joints in the concrete slab prior to installation of new materials. Preparation shall consist of removing any loose concrete or caulking material, providing and installing expansion joint material and leveling the area with Uzin NC 888 or approved equal.”

This addendum consists of 2 pages.

5. **ADD** the following as General Note #10, "The contractor will be responsible for cleaning the entire area with cleaning solution and mechanical scrubber, including damp mopping and 100% coverage of latex based primer prior to the installation of new materials."
6. **ADD** the following as General Note #11, "The contractor will be responsible for 100% coverage of troweled on skim coat of Uzin NC 888, or approved equal, prior to the installation of new materials."
7. **ADD** the following as General Note #12, "Any existing tile that extends under existing casework or existing HVAC equipment can be heated and cut at the edge of the interfering item."
8. **ADD** the following as General Note #13, "There is one stainless steel cover over plumbing clean-out to floor that the contractor must salvage before the tile work and reinstall after the tile work."
9. **ADD** the following as General Note #13, "The music room tile graphic of Alternate Bid #2 shall consist of all vinyl composition tile in Color 1 and Color 2, as selected by the Architect / Engineer."

This addendum **DOES NOT** alter the previously published bid date of **Friday, February 10, 2023, 2:00 PM**, prevailing time, at **Morrisonville C.U.S.D. No.1**.

Sincerely,
HURST-ROSCHE, INC.

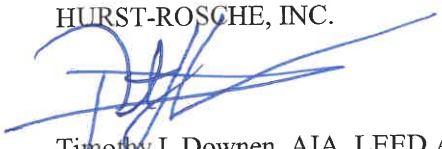

Timothy L. Downen, AIA, LEED AP
cc:All plan holders

This addendum consists of 2 pages.