

FLOOR TILE REPLACEMENT

MORRISONVILLE ELEMENTARY SCHOOL

MORRISONVILLE CUSD #1

MORRISONVILLE, CHRISTIAN COUNTY, ILLINOIS

ARCHITECT / ENGINEER :




Hurst-Rosche, Inc.
PROFESSIONAL DESIGN NUMBER: 184-000298

1400 E. TREMONT STREET
HILLSBORO, IL
PH: 217.532.3959


www.hurst-rosche.com

EAST ST. LOUIS, IL
MARION, IL
ARNOLD, MO
SPRINGFIELD, IL
NASHVILLE, TN

SITE LOCATION

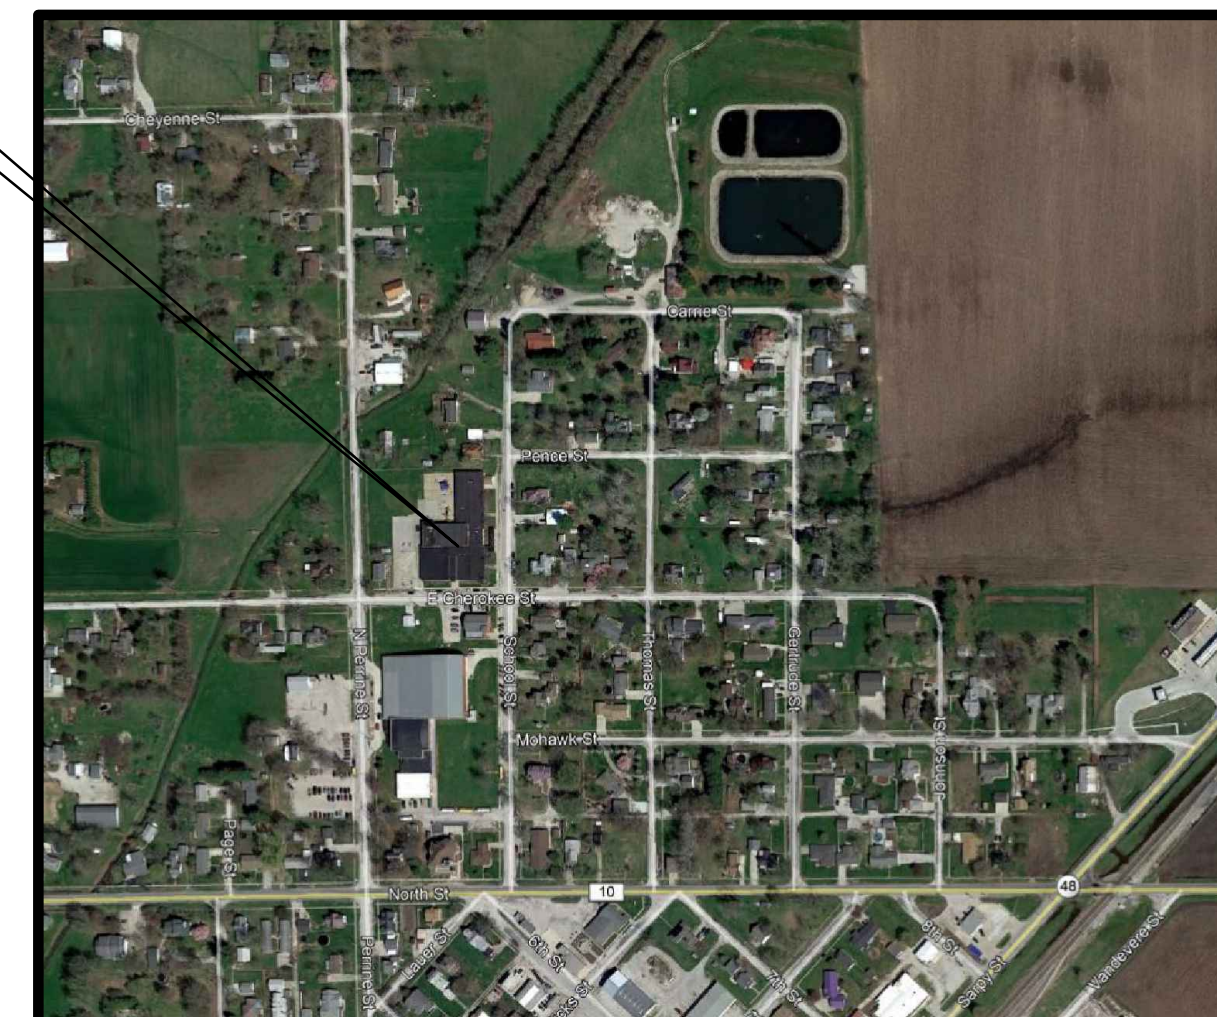


AREA LOCATION MAP

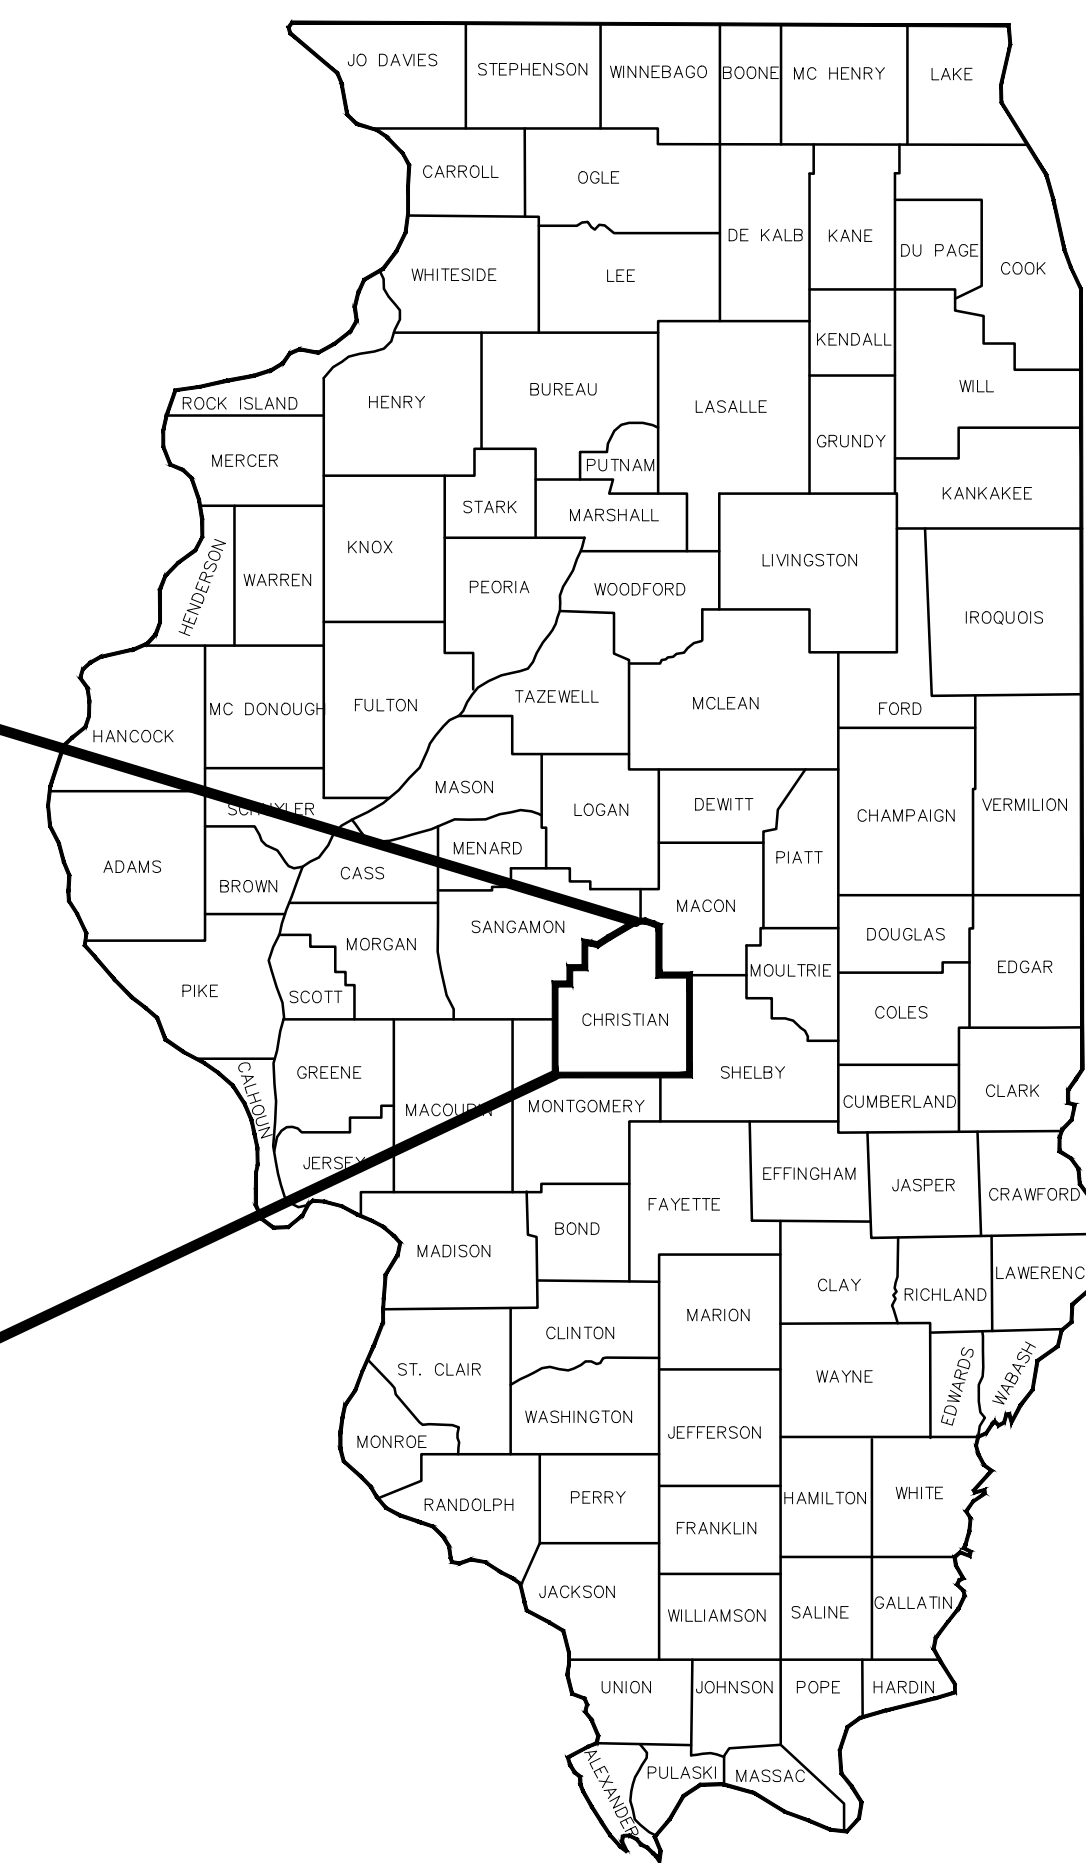



Hurst-Rosche, Inc.
 PROFESSIONAL DESIGN NUMBER: 184-00028
 1400 E. TREMONT STREET
 HILLSBORO, IL
 PH: 217.532.3959
 www.hurst-rosche.com
 EAST ST. LOUIS, IL
 MARION, IL
 ARNOLD, MO
 SPRINGFIELD, IL
 NASHVILLE, TN

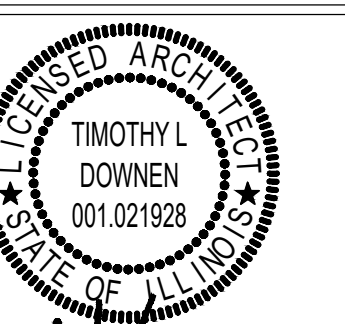

[Signature]
 SIGNATURE 01-23-2023
 DATE 11-30-2024
 LICENSE EXPIRES

Michael Emelan
 SIGNATURE 100-10660
 IDPH LICENSE No.: 05-15-2023
 IDPH LICENSE EXPIRES



**FLOOR TILE REPLACEMENT
 MORRISONVILLE ELEMENTARY
 SCHOOL
 MORRISONVILLE CUSD #1
 MORRISONVILLE, CHRISTIAN
 COUNTY, IL**

MK.	DATE	DESCRIPTION

DATE: 01-23-2023
 PROJECT NO: 150-3242
 DESIGN: TLD DRAWN: BJV CHECK: TLD

TILE REPLACEMENT PLAN

A-101

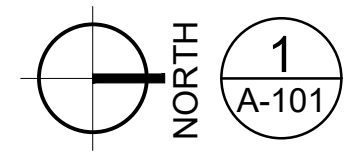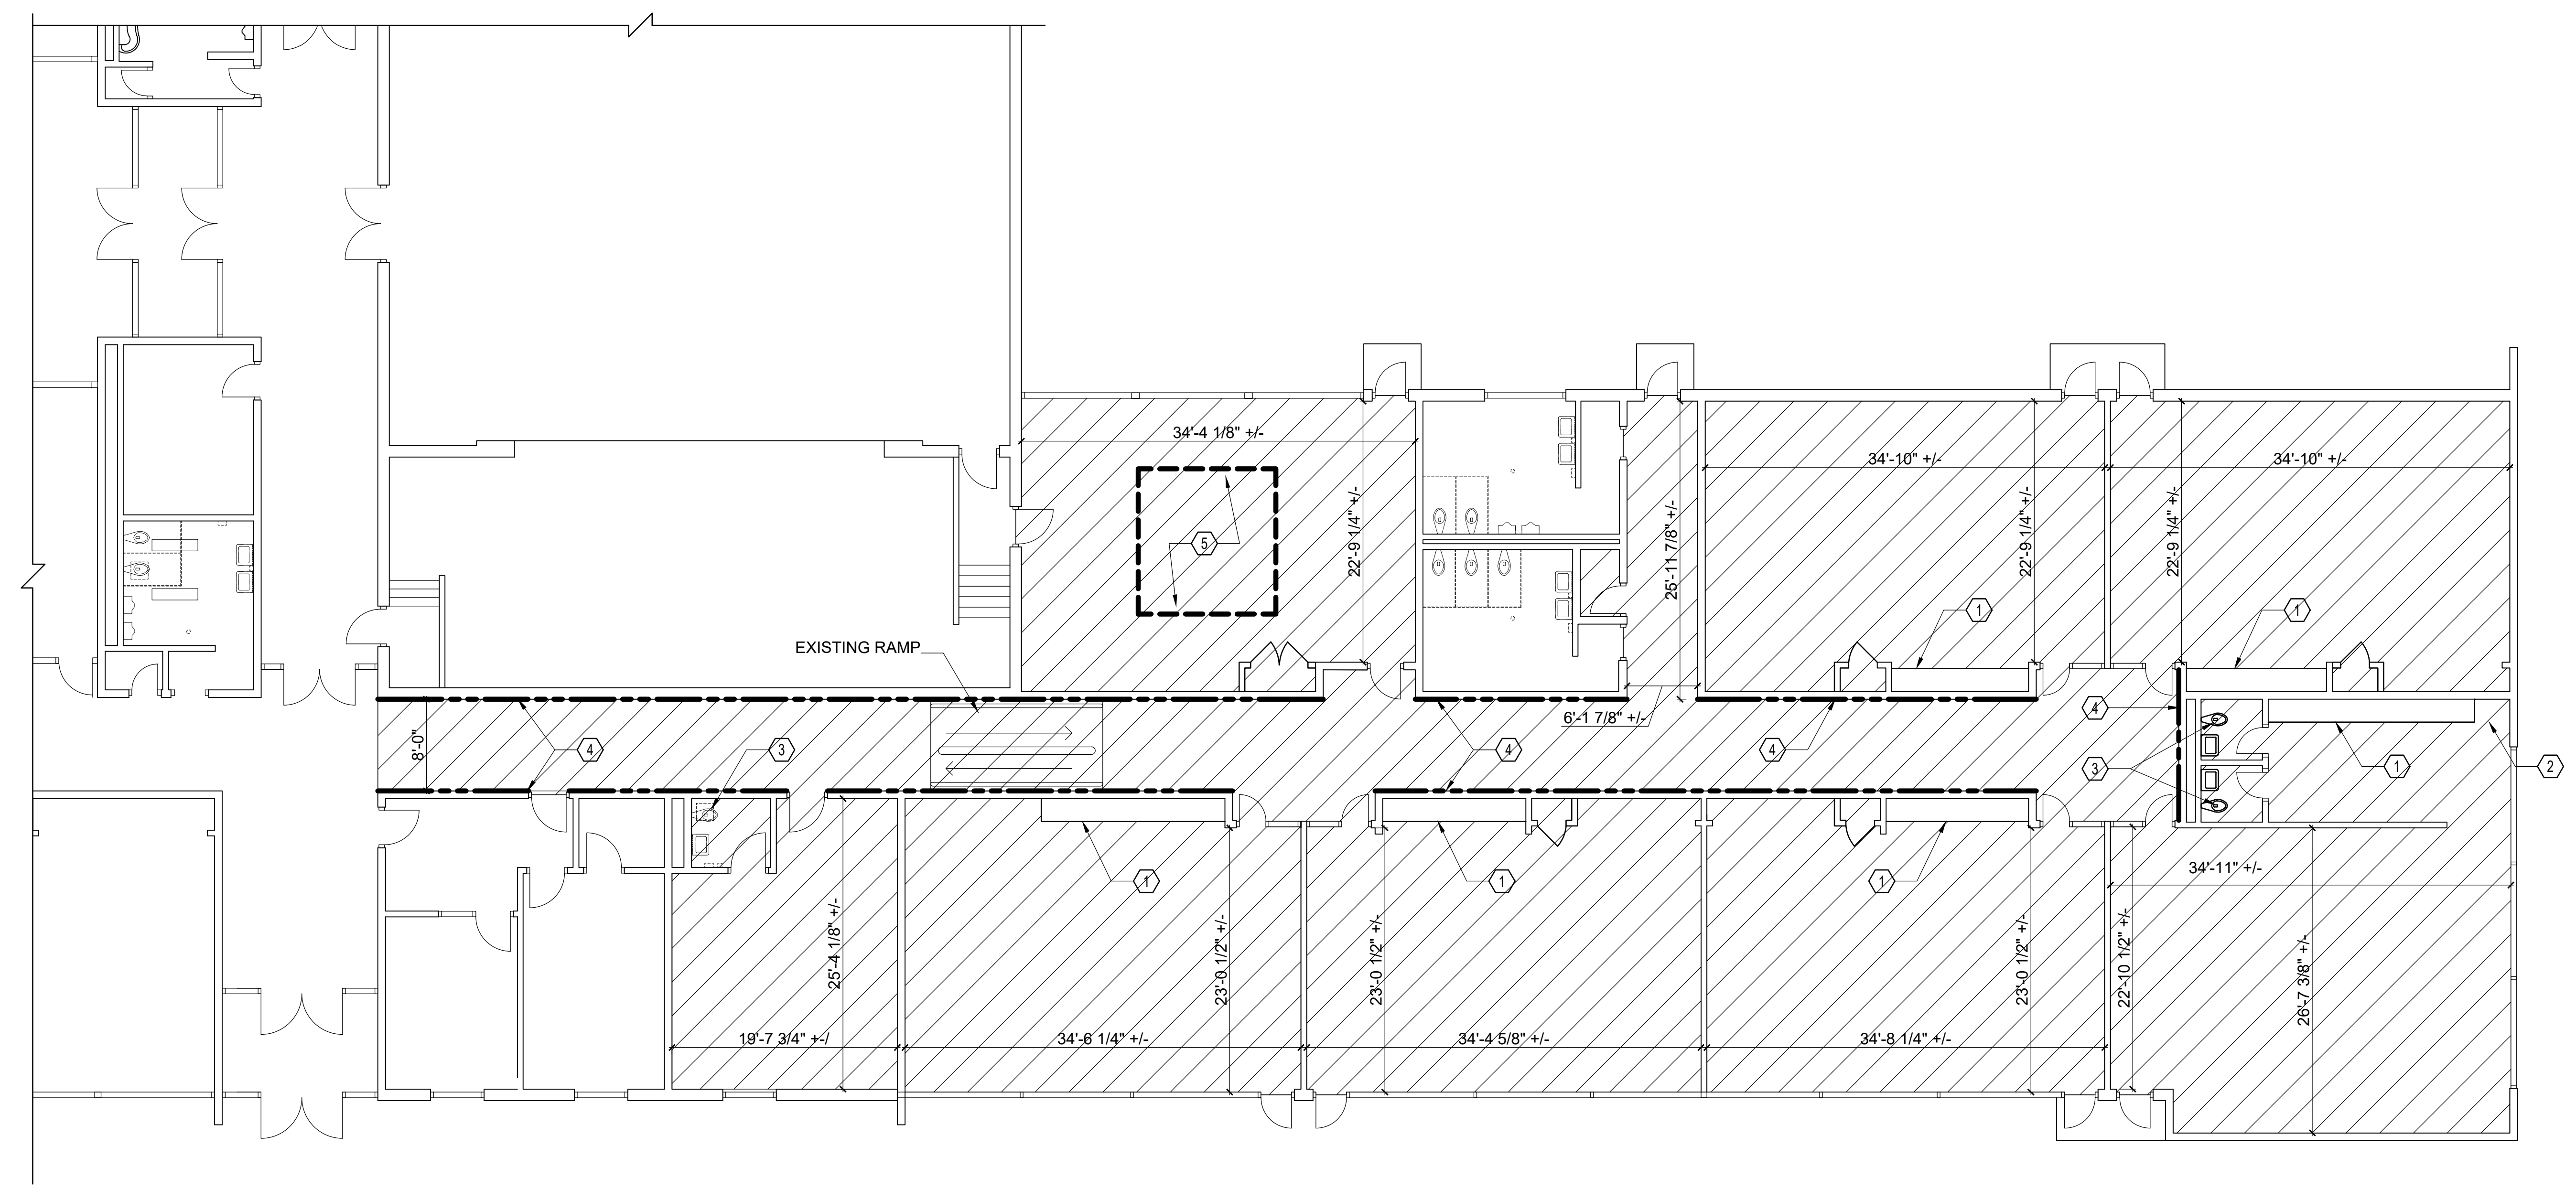


TILE REPLACEMENT PLAN
 SCALE: 1/16" = 1'-0"

- GENERAL NOTES:**
- CONTRACTOR TO INCLUDE 250 LINEAR FEET OF SELF LEVELING FILLER FOR CRACKS AND LOW SPOTS FOR EXISTING CONCRETE SLAB AROUND LOW PERIMETER NON-CORRIDOR ROOMS.
 - OWNER WILL REMOVE ALL FURNITURE AND EQUIPMENT FROM SPACES TO RECEIVE WORK.
 - CONTRACTOR RESPONSIBLE FOR REMOVAL OF ALL FLOOR MOUNTED DOOR STOPS TO ALLOW FOR FULL REMOVAL OF TILE.
 - CONTRACTOR SHALL BE RESPONSIBLE FOR SUBMITTING NOTIFICATION TO IDPH A MINIMUM OF 10 WORKING DAYS PRIOR TO ABATEMENT INITIATION AND ALL OTHER REQUIRED PERMITS AND NOTIFICATIONS AND ANY RELATED FEES.
 - FLOOR TILE MASTIC AND FLOOR TILE IS TO BE CONSIDERED ASBESTOS CONTAINING MATERIAL. BOTH MATERIALS TO BE ABATED INTACT BY APPROPRIATELY TRAINED PERSONNEL UTILIZING INFRARED HEAT METHODS. LEGALLY DISPOSE OF ACM WASTE AS REQUIRED BY REGULATIONS. WORK TO BE COMPLETED IN ACCORDANCE WITH ALL APPLICABLE RULES AND REGULATIONS. CLEAN CONCRETE SLAB FOR PROPER ADHESION OF NEW TILE.

- KEYED NOTES: (X)**
- EXISTING CASEWORK TO REMAIN. WALL BASE & WALL BASE MASTIC TO BE REMOVED AS NON-ASBESTOS CONTAINING MATERIALS. PROVIDE & INSTALL NEW 4" RUBBER BASE AS REPLACEMENT BASE.
 - DEPRESSED (SLOPED) AREA AT FLOOR CLEAN OUT.
 - DISTRICT TO REMOVE & REINSTALL EXISTING FLOOR MOUNTED WATER CLOSET.
 - ALTERNATE BID #1: PROVIDE & INSTALL 4" RUBBER BASE ALONG CORRIDOR.
 - ALTERNATE BID #2: PROVIDE & INSTALL MUSIC GRAPHIC INTO TILE AS INDICATED ON 2/A-101.

- LEGEND:**
- EXISTING FLOOR TILE AND FLOOR TILE MASTIC TO BE ABATED AND LEGALLY DISPOSED OF AS ASBESTOS WASTE. ANY WALL BASE MATERIAL AND WALL BASE MASTIC TO BE REMOVED AS NON-ASBESTOS CONTAINING MATERIAL. PROVIDE & INSTALL NEW VINYL COMPOSITION TILE TO REPLACE ABATED TILE.

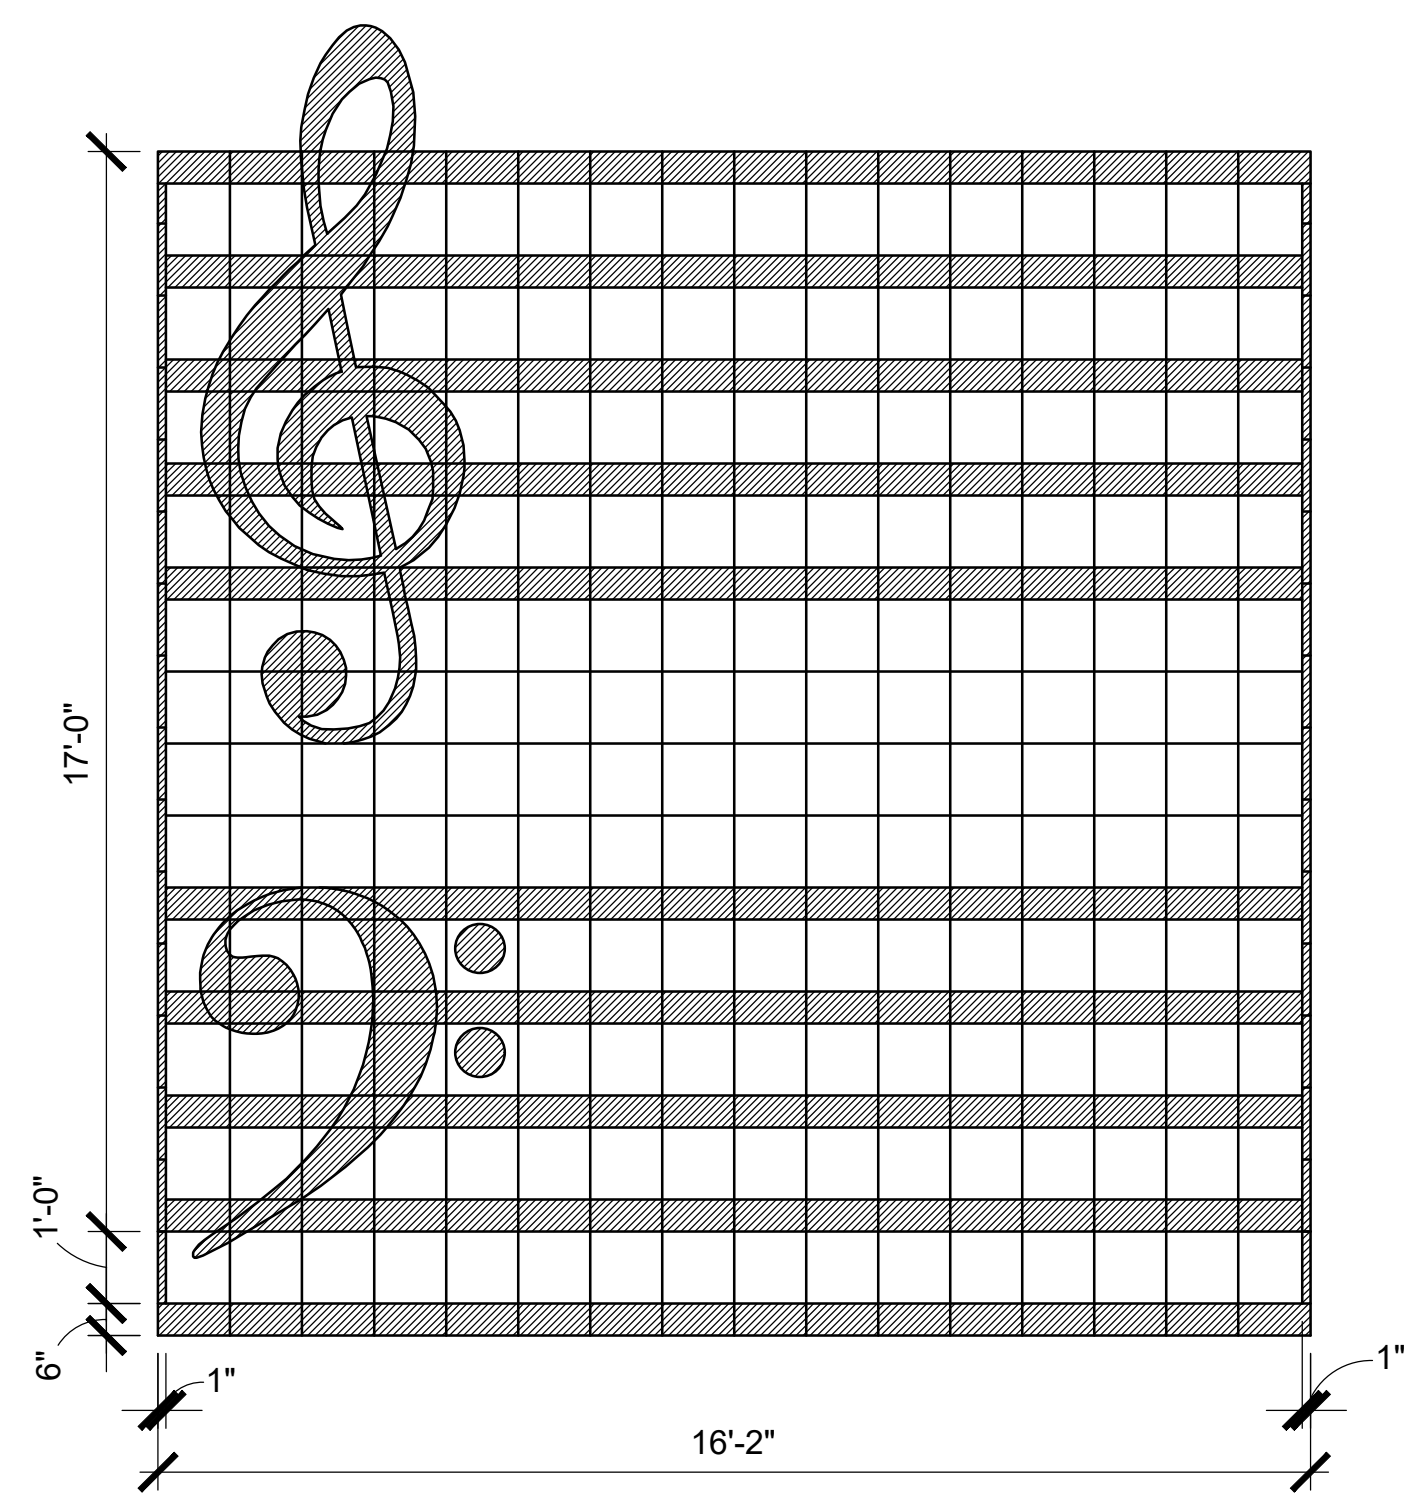

2 A-101 MUSIC ROOM TILE GRAPHIC
 SCALE: 3/8" = 1'-0"